
PUSULA MAKİNA

English edition · November 2026

PUSULA MAKINA · ISTANBUL

Product Catalog 2026–2027

Liquid Filling and Packaging Machine Manufacturer in Istanbul

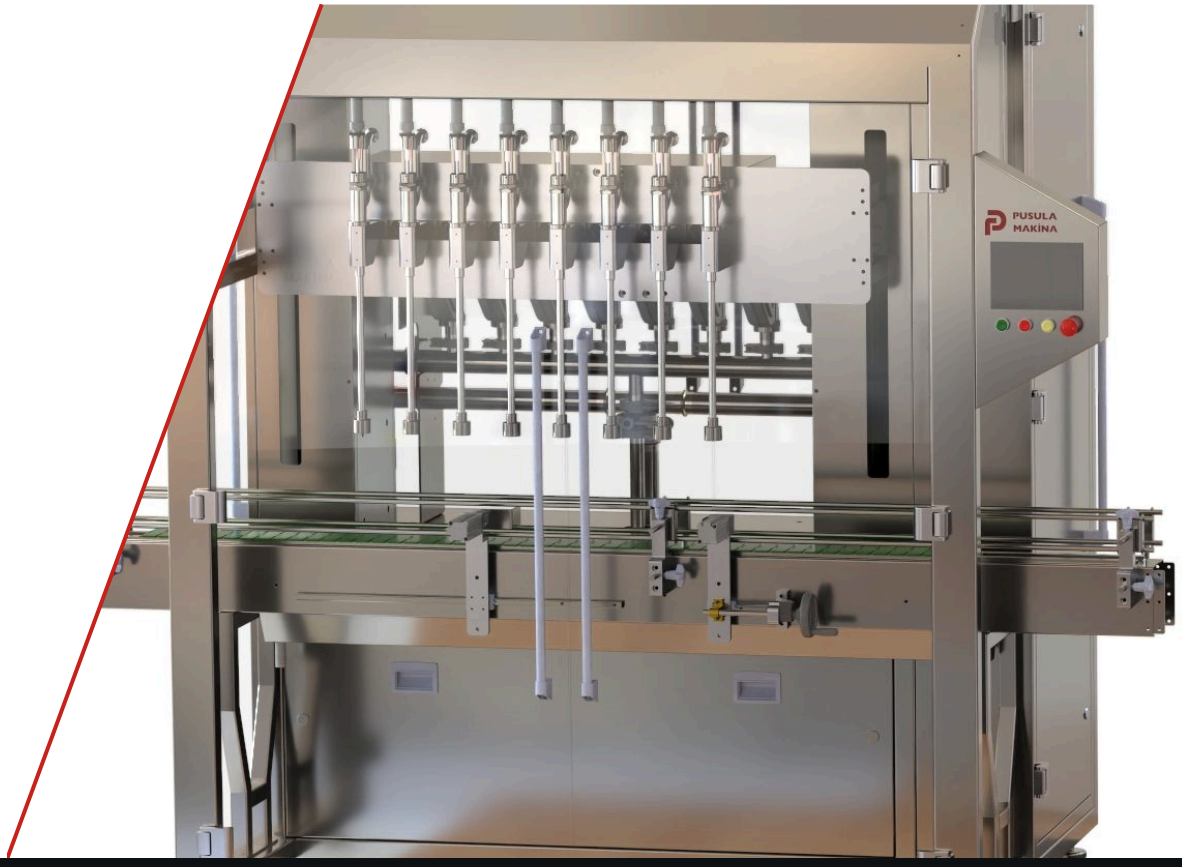

01
Liquid Filling
p. 4

02
Perfume Packaging
p. 13

03
Capping and Labeling
p. 26

04
Front-End and End-of-Line
p. 34

+90 537 916 03 71 pusulamachine.com info@pusulamachine.com

PUSULA MAKINA · ISTANBUL

About Pusula Makina

Pusula Makina builds liquid filling, perfume packaging, capping, labeling and front-end and end-of-line machines in Istanbul.

We build single machines and complete lines, from filling to palletizing. In every project we first listen to your product, container and target capacity, and then recommend the machine and line accordingly.

Countries we have shipped machines to: Algeria, Russia, Iran, Egypt, Poland, North Macedonia, Lebanon and Libya.

For customers abroad, we send a technician for on-site installation, give remote support by video call and ship spare parts.

Company-wide technical standards

Hygienic design	AISI 316 stainless steel on product-contact surfaces and Tri-Clamp quick connections
Automation	PLC, 9-inch touchscreen panel and unlimited recipe storage
Motion	Servo-controlled motion, 1 ms motion cycle and 1100 mm/s nozzle speed
Safety	Guarding, safety contacts and remote monitoring infrastructure
Maintenance	Quick format changeover and a layout that gives easy access to every point of the machine
Custom manufacturing	Turnkey line design according to your product, packaging and capacity targets

These are company-wide statements. Not every machine has the same equipment. Machine-specific values are in the technical table on each machine page.

How we work

01
Analysis and project design

We study your production capacity, floor area and container. We prepare the machine layout and the necessary calculations.

02
Quote and configuration

We present the equipment package that fits your project (Prestige or Basic) and the line options in writing, with a technical specification and a quote.

03
Manufacturing and automation

We build the chassis of the approved project, assemble it and complete the automation software in our own facility.

04
Testing, installation and delivery

We test the machine at our factory. The scope of installation, line integration, operator training and delivery is written in the quote.

Contents

About Pusula Makina 2

01 Liquid Filling 4
- Flowmeter Filling Machine, Prestige Series 5
- Flowmeter Filling Machine, Basic Series 7
- Piston Filling Machine, Prestige Series 9
- Piston Filling Machine, Basic Series 11

02 Perfume Packaging 13
- Rotary Perfume Filling and Capping Line 14
- Linear Perfume Filling Line 16
- Indexing Perfume Filling and Crimping Line 18
- Semi-Automatic Perfume Filling Machine 20
- Semi-Automatic Perfume Crimping Machine 22
- Manual Perfume Collar Pressing Machine 24

03 Capping and Labeling 26
- Wrap-Around Labeler for Round Bottles 27
- Single-Side Flat Bottle Labeling Machine 27
- Double-Sided Oval Bottle Labeler 27
- Servo Capping Machine 28
- Magnetic Torque Capping Machine 30
- Pneumatic Capping Machine 32

04 Front-End and End-of-Line 34
- Rotary Bottle Feeding Table 35
- Case Barcode Labeling Machine 35
- Bottle Unscrambler 36
- Case Erector and Sealer Machine 38
- Palletizing Machine 40

Turnkey Lines 42
- Auxiliary equipment 43

Get a quote for your project 44

A line from filling to palletizing

01 Bottle feeding
Feeds empty bottles and caps into the line in order.
p. 34

02 Mixing
Mixes the product before filling.
p. 43

03 Filling
Fills the product into the bottle.
p. 4 · p. 13

04 Capping
Tightens the cap or valve onto the bottle.
p. 13 · p. 26

05 Labeling
Applies a label to the bottle.
p. 26

06 Case packing
Erects, closes and labels cartons.
p. 34


07 Palletizing
Arranges cartons on the pallet.
p. 34

01

PRODUCTS

Liquid Filling

Flowmeter and piston (volumetric) liquid filling machines. Both are offered in the Prestige and Basic equipment packages.

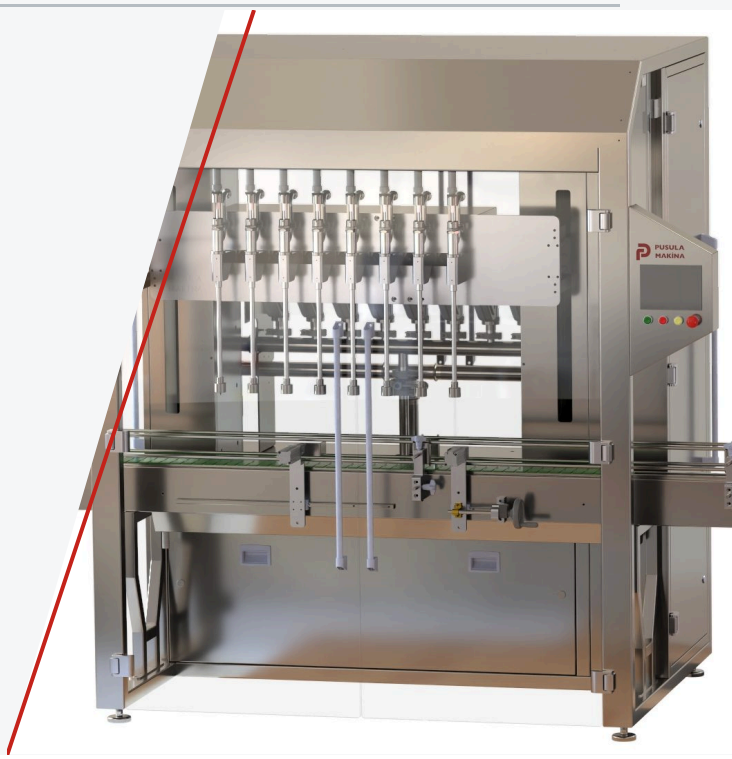

Bottle feeding | **Filling** | Capping | Labeling | Case packing | Palletizing

Machines in this section

Model	Machine	Key values	
LDF8	**Flowmeter Filling Machine, Prestige Series**	Number of Heads 4–12 Filling Accuracy ±0.3 % Energy Consumption 5.5 kW	**5**
BLD4	**Flowmeter Filling Machine, Basic Series**	Number of Heads 4–12 Filling Accuracy ±0.3 % Energy Consumption 5.5 kW	**7**
LDD8	**Piston Filling Machine, Prestige Series**	Number of Heads 4–12 Filling Accuracy ±0.3 % Energy Consumption 5.5 kW	**9**
	Piston Filling Machine, Basic Series	Number of Heads 4–12 Filling Accuracy ±0.3 % Energy Consumption 5.5 kW	**11**

LIQUID FILLING · FLOWMETER FILLING

Flowmeter Filling Machine, Prestige Series

Model **LDF8**


Machine page
Request a quote for this machine
Write on WhatsApp

pusulamachine.com/en/products/liquid-filling-machines/flowmeter-filling-machine-prestige-series/



The Prestige series flowmeter machine measures the liquid that passes through and fills by that amount. It is a linear-line machine with 4–12 filling heads. The 100-litre filling tank has level control and automatic cleaning. The fill amount is set digitally on the touchscreen operator panel. Product-contact surfaces are AISI 316 stainless steel. It is used for food, chemical, cosmetic, pharmaceutical and lubricant products.

Operating Principle **Flowmeter-Based Filling**	Number of Heads **4–12**	Filling Accuracy **±0.3** %
Energy Consumption **5.5** kW	Total Weight **2000–2300** kg	Control Unit **Siemens automation system**

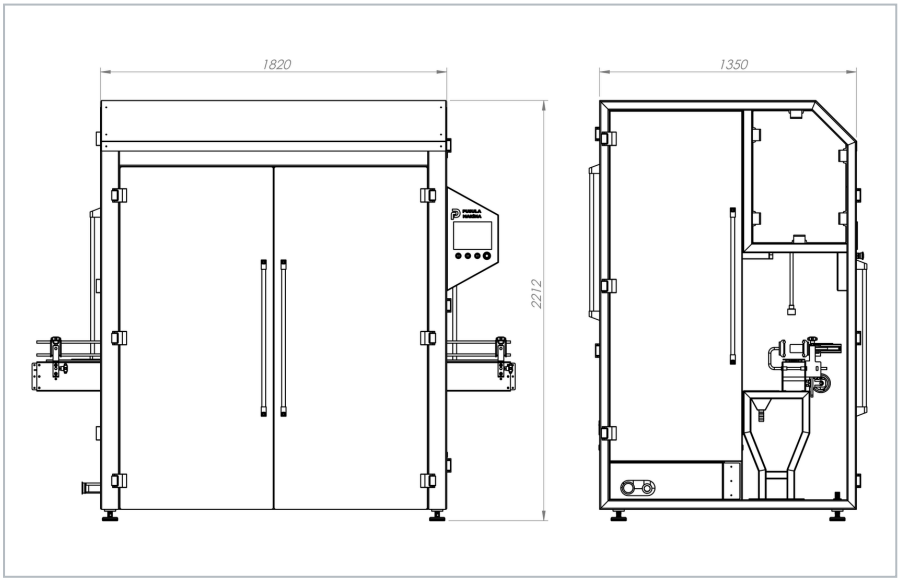

Dimensions

Width	**1820** mm
Depth	**1350** mm
Height	**2212** mm

These dimensions do not include the conveyors.

Applications

food, chemical, cosmetics, pharmaceutical, lubricants

Technical specifications

Operating Principle	Flowmeter-Based Filling
Filling Accuracy	±0.3 %
Number of Heads	4–12
Energy Consumption	5.5 kW
Total Weight	2000–2300 kg
System Type	Linear Line
Construction and Materials	Main chassis steel construction; product-contact surfaces AISI 316; visible exterior surfaces AISI 304 stainless steel
Control Unit	Siemens automation system
Filling Tank Capacity	100 L (level control and automatic cleaning)
Compatible Packaging Types	Plastic, glass and metal packaging
Flowmeter	Krohne
Fill Amount Adjustment	Digital adjustment via the touchscreen operator panel
Electrical Requirement	380 V, 50 Hz, three-phase
Air Requirement	6–8 bar
Production Capacity	Varies depending on container shape, neck design and product viscosity (flowability).

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- The stainless steels used in the machine are grades 304 and 316.
- Pneumatic components are from SMC.
- Detection uses SICK and BANNER photocells and sensors.
- Gearboxes are from Varvel and Yılmaz Redüktör.
- Hygienic Tri-Clamp fittings are used. They are quick to fit and remove.
- Control is by a Siemens PLC.
- Motion control runs with a 1 ms cycle time.
- Nozzle travel speed is up to 1100 mm/s.
- Nozzle positioning and line tracking are servo driven.
- Servo motors use One Cable Technology (OCT): power and data run through a single cable.
- A 9-inch touchscreen operator panel with a Siemens display is used.
- Recipe memory is unlimited. Recipes are saved and recalled with one key.
- Conveyor speed is variably controlled, which keeps power use and noise low.
- The machine screen can be reached remotely. Staff can intervene and follow live production counts.
- Servo motor power consumption can be followed live on the screen.
- An overload protection system guards against damage caused by wrong settings.
- Doors have safety interlock contacts and the machine has emergency stop buttons.
- Product or format changeovers keep downtime short.
- Every part of the machine is easy to reach for maintenance.
- Sensors detect overlapping or jammed products and the machine stops automatically.

Options

Titanium or engineering plastic nozzle option.

LIQUID FILLING · FLOWMETER FILLING

Flowmeter Filling Machine, Basic Series

Model **BLD4**


Machine page
Request a quote for this machine
Write on WhatsApp

pusulamachine.com/en/products/liquid-filling-machines/flowmeter-filling-machine-basic-series/



The Basic series flowmeter machine is the more economical equipment package, meant for medium and small production lines. It uses a flowmeter to fill thin and medium-thick liquids. It is used for food, chemical and cosmetic products. It is a linear-line machine with 4–12 filling heads and a weight of 1000–1500 kg. The 100-litre filling tank has level control and automatic cleaning. The fill amount is set digitally on the touchscreen operator panel.

Operating Principle **Flowmeter-Based Filling**	Number of Heads **4–12**	Filling Accuracy **±0.3** %
Energy Consumption **5.5** kW	Total Weight **1000–1500** kg	Control Unit **Delta automation system**

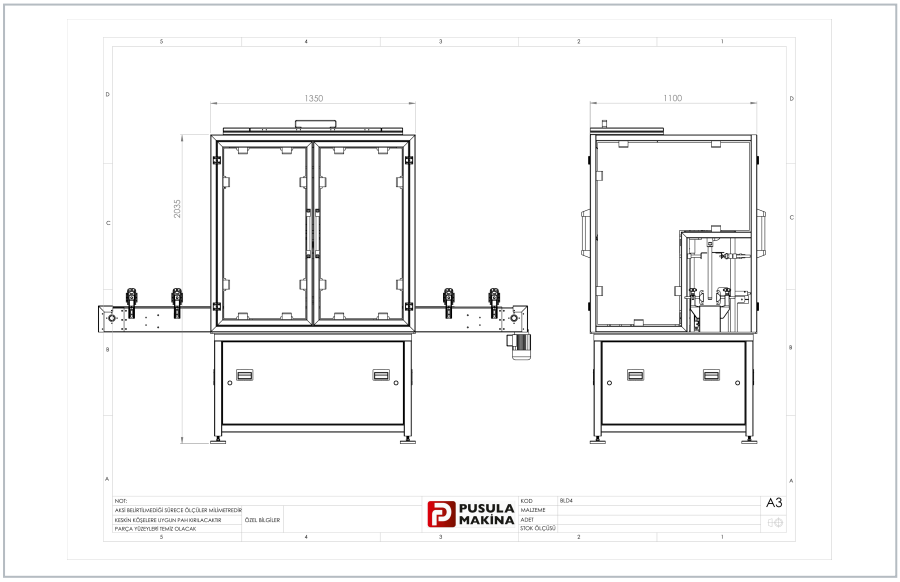

Dimensions

Width	**1350** mm
Depth	**1100** mm
Height	**2035** mm

These dimensions do not include the conveyors.

Applications

food, chemical, cosmetics

Technical specifications

Operating Principle	Flowmeter-Based Filling
Filling Accuracy	±0.3 %
Number of Heads	4–12
Energy Consumption	5.5 kW
Total Weight	1000–1500 kg
System Type	Linear Line
Construction and Materials	Main chassis steel construction; product-contact surfaces AISI 316; visible exterior surfaces AISI 304 stainless steel
Control Unit	Delta automation system
Filling Tank Capacity	100 L (level control and automatic cleaning)
Compatible Packaging Types	Plastic, glass and metal packaging
Fill Amount Adjustment	Digital adjustment via the touchscreen operator panel
Electrical Requirement	380 V, 50 Hz, three-phase
Air Requirement	6–8 bar
Production Capacity	Varies depending on container shape, neck design and product viscosity (flowability).

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- The stainless steels used in the machine are grades 304 and 316.
- Pneumatic components are from SMC.
- Detection uses SICK and BANNER photocells and sensors.
- Gearboxes are from Yılmaz Redüktör.
- Control is by a Delta PLC.
- Servo motors use One Cable Technology (OCT): power and data run through a single cable.
- A 7-inch touchscreen operator panel with a Delta display is used.
- Recipe memory is unlimited. Recipes are saved and recalled with one key.
- Conveyor speed is variably controlled, which keeps power use and noise low.
- Servo motor power consumption can be followed live on the screen.
- An overload protection system guards against damage caused by wrong settings.
- A safe, fully enclosed guard housing protects staff and keeps the surroundings clean.
- Doors have safety interlock contacts and the machine has emergency stop buttons.
- Product or format changeovers keep downtime short.
- Every part of the machine is easy to reach for maintenance.
- Sensors detect overlapping or jammed products and the machine stops automatically.

Options

Titanium or engineering plastic nozzle option.

LIQUID FILLING · PISTON (VOLUMETRIC) FILLING

Piston Filling Machine, Prestige Series

Model **LDD8**


Machine page
Request a quote for this machine
Write on WhatsApp

pusulamachine.com/en/products/liquid-filling-machines/piston-filling-machine-prestige-series/



The Prestige series piston (volumetric) machine fills the volume of its piston stroke. The piston is driven by a servo motor. It is recommended for thick products such as cream, shampoo, gel, paste and heavy oil. It is a linear-line machine with 4–12 filling heads. The 100-litre filling tank has level control and automatic cleaning. The cylinder is AISI 316 stainless steel. The fill amount is set digitally on the touchscreen operator panel.

Operating Principle	Number of Heads	Filling Accuracy
Volumetric Filling	**4–12**	**±0.3** %
Energy Consumption	**Total Weight**	**Control Unit**
5.5 kW	**2000–2300** kg	**Siemens automation system**

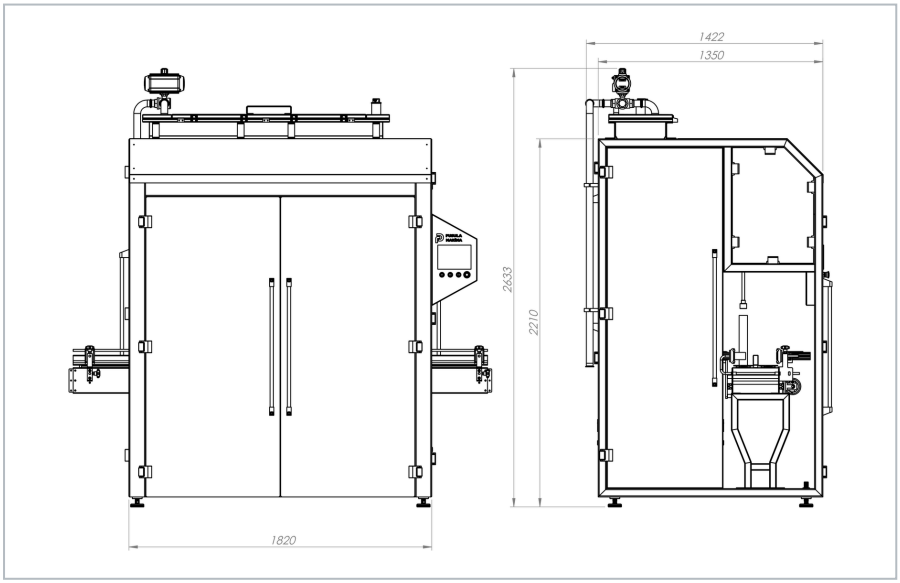

Dimensions

Width	**1820** mm
Depth	**1422** mm
Height	**2633** mm

These dimensions do not include the conveyors.

Applications

food, chemical, cosmetics

Technical specifications

Operating Principle	Volumetric Filling
Filling Accuracy	±0.3 %
Number of Heads	4–12
Energy Consumption	5.5 kW
Total Weight	2000–2300 kg
System Type	Linear Line
Construction and Materials	Main chassis steel construction; product-contact surfaces AISI 316; visible exterior surfaces AISI 304 stainless steel
Control Unit	Siemens automation system
Filling Tank Capacity	100 L (level control and automatic cleaning)
Compatible Packaging Types	Plastic, glass and metal packaging
Cylinder Structure	AISI 316 stainless steel
Fill Amount Adjustment	Digital adjustment via the touchscreen operator panel
Electrical Requirement	380 V, 50 Hz, three-phase
Air Requirement	6–8 bar
Production Capacity	Varies depending on container shape, neck design and product viscosity (flowability).

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- The stainless steels used in the machine are grades 304 and 316.
- Pneumatic components are from SMC.
- Detection uses SICK and BANNER photocells and sensors.
- Gearboxes are from Varvel and Yılmaz Redüktör.
- Hygienic Tri-Clamp fittings are used. They are quick to fit and remove.
- Control is by a Siemens PLC.
- Motion control runs with a 1 ms cycle time.
- Nozzle travel speed is up to 1100 mm/s.
- Nozzle positioning and line tracking are servo driven.
- Servo motors use One Cable Technology (OCT): power and data run through a single cable.
- A 9-inch touchscreen operator panel with a Siemens display is used.
- Recipe memory is unlimited. Recipes are saved and recalled with one key.
- Conveyor speed is variably controlled, which keeps power use and noise low.
- The machine screen can be reached remotely. Staff can intervene and follow live production counts.
- Servo motor power consumption can be followed live on the screen.
- An overload protection system guards against damage caused by wrong settings.
- Doors have safety interlock contacts and the machine has emergency stop buttons.
- Product or format changeovers keep downtime short.
- Every part of the machine is easy to reach for maintenance.
- Sensors detect overlapping or jammed products and the machine stops automatically.

Options

Titanium or engineering plastic nozzle option.

LIQUID FILLING · PISTON (VOLUMETRIC) FILLING

Piston Filling Machine, Basic Series


Machine page
Request a quote for this machine
Write on WhatsApp

pusulamachine.com/en/products/liquid-filling-machines/piston-filling-machine-basic-series/



The Basic series piston (volumetric) machine is the more economical equipment package for filling thick and medium-thick products. It is used for detergent, liquid soap, olive oil and cosmetic liquids. It is a linear-line machine with 4–12 filling heads and a weight of 1000–1500 kg. The fill amount is set digitally on the touchscreen operator panel.

Operating Principle **Volumetric Filling**	Number of Heads **4–12**	Filling Accuracy **±0.3** %
Energy Consumption **5.5** kW	Total Weight **1000–1500** kg	Control Unit **Delta automation system**

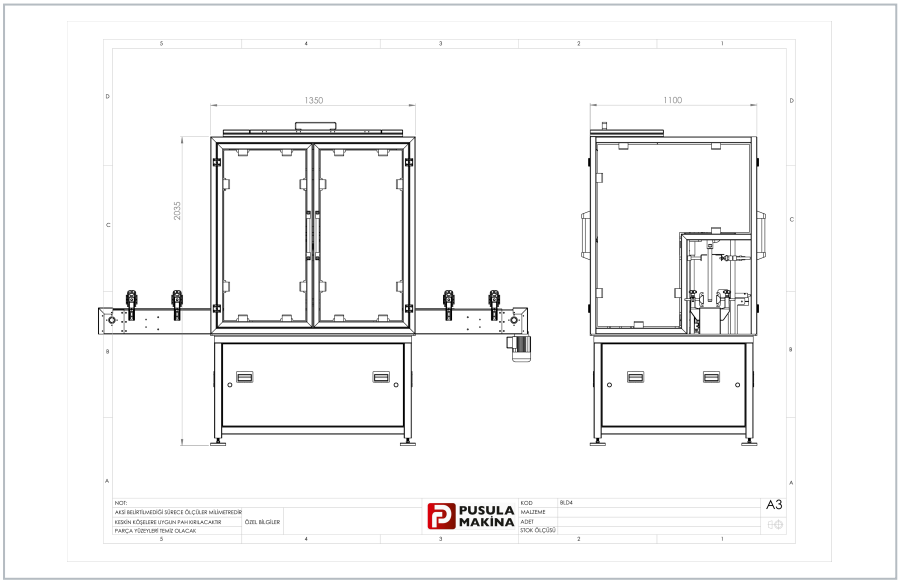

Dimensions

Width	**1350** mm
Depth	**1100** mm
Height	**2035** mm

These dimensions do not include the conveyors.

Applications

cosmetics, detergents

Technical specifications

Operating Principle	Volumetric Filling
Filling Accuracy	±0.3 %
Number of Heads	4–12
Energy Consumption	5.5 kW
Total Weight	1000–1500 kg
System Type	Linear Line
Construction and Materials	Main chassis steel construction; product-contact surfaces AISI 316; visible exterior surfaces AISI 304 stainless steel
Control Unit	Delta automation system
Filling Tank Capacity	100 L (level control and automatic cleaning)
Compatible Packaging Types	Plastic, glass and metal packaging
Cylinder Structure	AISI 316 stainless steel
Fill Amount Adjustment	Digital adjustment via the touchscreen operator panel
Electrical Requirement	380 V, 50 Hz, three-phase
Air Requirement	6–8 bar
Production Capacity	Varies depending on container shape, neck design and product viscosity (flowability).

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- The stainless steels used in the machine are grades 304 and 316.
- Pneumatic components are from SMC.
- Detection uses SICK and BANNER photocells and sensors.
- Gearboxes are from Yılmaz Redüktör.
- Control is by a Delta PLC.
- Servo motors use One Cable Technology (OCT): power and data run through a single cable.
- A 7-inch touchscreen operator panel with a Delta display is used.
- Recipe memory is unlimited. Recipes are saved and recalled with one key.
- Conveyor speed is variably controlled, which keeps power use and noise low.
- Servo motor power consumption can be followed live on the screen.
- An overload protection system guards against damage caused by wrong settings.
- A safe, fully enclosed guard housing protects staff and keeps the surroundings clean.
- Doors have safety interlock contacts and the machine has emergency stop buttons.
- Product or format changeovers keep downtime short.
- Every part of the machine is easy to reach for maintenance.
- Sensors detect overlapping or jammed products and the machine stops automatically.

Options


Titanium or engineering plastic nozzle option.

02

PRODUCTS

Perfume Packaging

Automatic perfume filling lines, and manual and semi-automatic filling, crimping and collar machines for boutique makers.

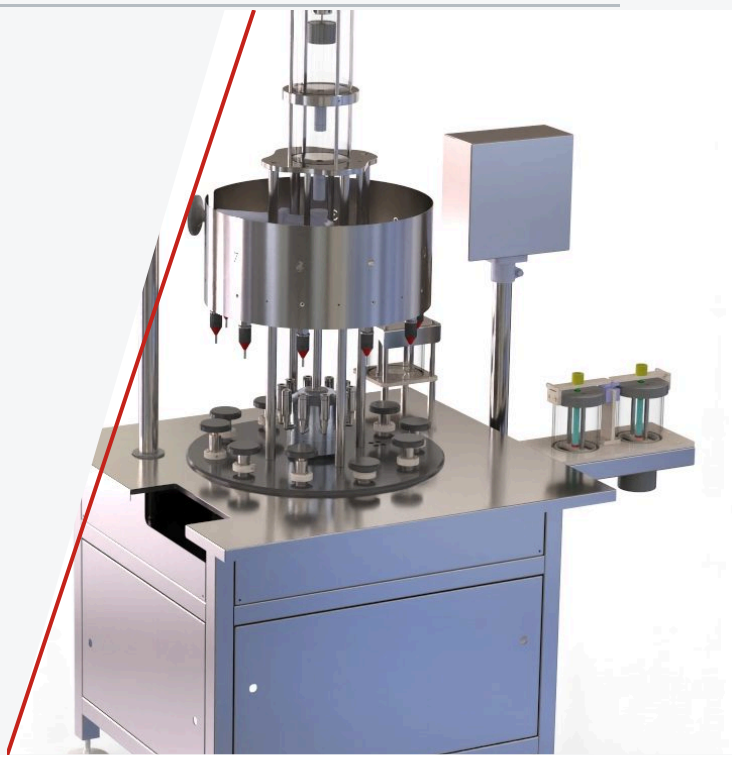

Bottle feeding | **Filling** | **Capping** | Labeling | Case packing | Palletizing

Machines in this section

Model	Machine	Key values	
RPD	**Rotary Perfume Filling and Capping Line**	Number of Heads 4–12 Filling Method Volumetric Energy Consumption 5.5 kW	**14**
LPD	**Linear Perfume Filling Line**	Number of Heads 4–12 Filling Method Volumetric Energy Consumption 5.5 kW	**16**
BM20	**Indexing Perfume Filling and Crimping Line**	Number of Heads 1 blow-off + 4 filling Filling Method Level Filling Fill Amount Range 20–500 mL	**18**
MNP	**Semi-Automatic Perfume Filling Machine**	Number of Heads 1–2 Filling Accuracy ±0.9 % Total Weight 20–30 kg	**20**
MNPP	**Semi-Automatic Perfume Crimping Machine**	Number of Heads 1 Total Weight 25–30 kg	**22**
MNPY	**Manual Perfume Collar Pressing Machine**	Number of Heads 1 Total Weight 25–30 kg	**24**

PERFUME PACKAGING · AUTOMATIC LINES

Rotary Perfume Filling and Capping Line

Model **RPD**


Machine page
Request a quote for this machine
Write on WhatsApp

pusulamachine.com/en/products/perfume-packaging-machines/rotary-perfume-filling-capping-line/



This line fills perfume bottles under vacuum and closes them on a single rotary table. Its compact layout suits limited floor space. The model is RPD: a machine with 4–12 filling heads, volumetric filling and a double-chamber glass tank. It weighs 750–1250 kg.

Operating Principle **Vacuum Filling**	Number of Heads **4–12**	Filling Method **Volumetric**
Energy Consumption **5.5** kW	Total Weight **750–1250** kg	Control Unit **Delta automation system**

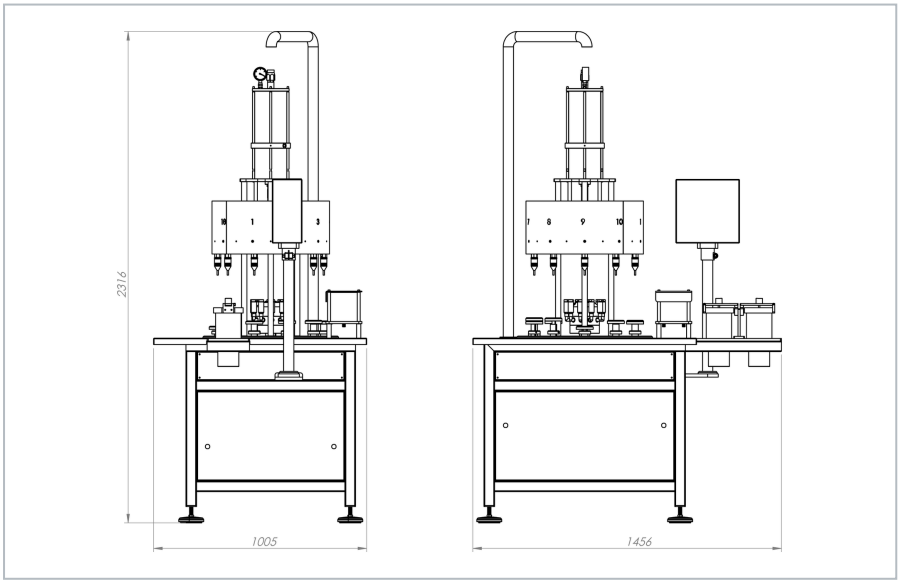

Dimensions

Width	**1456** mm
Depth	**1005** mm
Height	**2316** mm

Applications

cosmetics, perfume

Technical specifications

Operating Principle	Vacuum Filling
Filling Method	Volumetric
Number of Heads	4–12
Energy Consumption	5.5 kW
Total Weight	750–1250 kg
System Type	Rotary Filling
Construction and Materials	Main chassis steel construction; product-contact surfaces AISI 316; visible exterior surfaces AISI 304 stainless steel
Control Unit	Delta automation system
Filling Tank Structure	Double-chamber glass tank
Compatible Packaging Types	Plastic, glass and metal packaging
Cylinder Structure	AISI 316 stainless steel
Fill Amount Adjustment	Digital adjustment via the touchscreen operator panel
Electrical Requirement	380 V, 50 Hz, three-phase
Air Requirement	6–8 bar
Production Capacity	Varies depending on container shape, neck design and product viscosity (flowability).

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- The stainless steels used in the machine are grades 304 and 316.
- Pneumatic components are from SMC.
- Detection uses SICK and BANNER photocells and sensors.
- Gearboxes are from Yılmaz Redüktör.
- Control is by a Delta PLC.
- Servo motors use One Cable Technology (OCT): power and data run through a single cable.
- A 7-inch touchscreen operator panel with a Delta display is used.
- Conveyor speed is variably controlled, which keeps power use and noise low.
- An overload protection system guards against damage caused by wrong settings.
- Product or format changeovers keep downtime short.

Options

Optional ex-proof (explosion-protected) equipment, for environments with flammable products such as alcohol.

PERFUME PACKAGING · AUTOMATIC LINES

Linear Perfume Filling Line

Model **LPD**


Machine page
Request a quote for this machine
Write on WhatsApp

pusulamachine.com/en/products/perfume-packaging-machines/linear-perfume-filling-line/



The linear line moves glass or plastic perfume containers along a conveyor. Bottles pass through vacuum filling, valve seating, crimping and collar tightening stations. Its modular build is meant for different bottle shapes and fragrance types. It fills under vacuum, has 4–12 filling heads and a double-chamber glass tank.

Operating Principle **Vacuum Filling**	Number of Heads **4–12**	Filling Method **Volumetric**
Energy Consumption **5.5** kW	Total Weight **750–1250** kg	Control Unit **Delta automation system**

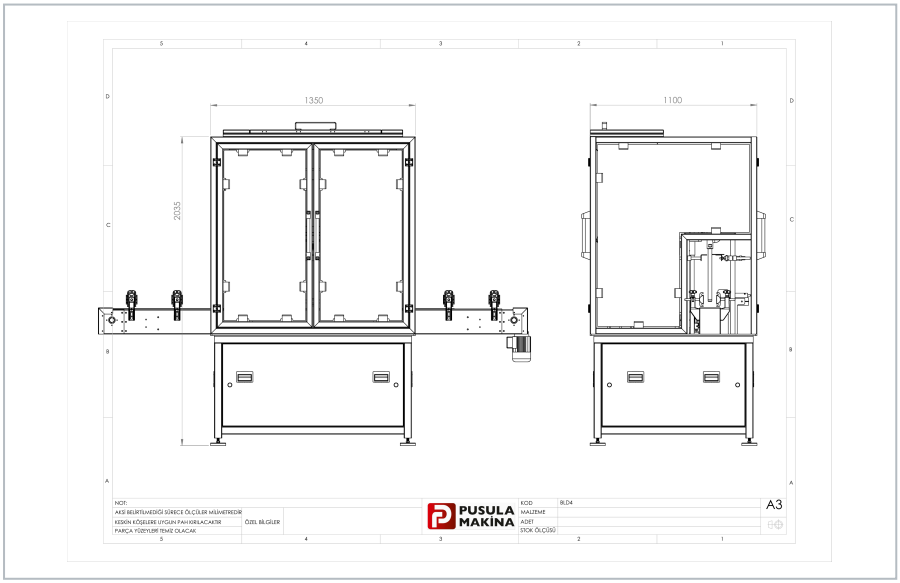

Dimensions

Width	**1350** mm
Depth	**1100** mm
Height	**2035** mm

These dimensions do not include the conveyors.

Applications

cosmetics, perfume

Technical specifications

Operating Principle	Vacuum Filling
Filling Method	Volumetric
Number of Heads	4–12
Energy Consumption	5.5 kW
Total Weight	750–1250 kg
System Type	Linear Filling
Construction and Materials	Main chassis steel construction; product-contact surfaces AISI 316; visible exterior surfaces AISI 304 stainless steel
Control Unit	Delta automation system
Filling Tank Structure	Double-chamber glass tank
Compatible Packaging Types	Plastic, glass and metal packaging
Cylinder Structure	AISI 316 stainless steel
Fill Amount Adjustment	Digital adjustment via the touchscreen operator panel
Electrical Requirement	380 V, 50 Hz, three-phase
Air Requirement	6–8 bar
Production Capacity	Varies depending on container shape, neck design and product viscosity (flowability).

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- The stainless steels used in the machine are grades 304 and 316.
- Pneumatic components are from SMC.
- Detection uses SICK and BANNER photocells and sensors.
- Gearboxes are from Yılmaz Redüktör.
- Control is by a Delta PLC.
- Servo motors use One Cable Technology (OCT): power and data run through a single cable.
- A 7-inch touchscreen operator panel with a Delta display is used.
- Conveyor speed is variably controlled, which keeps power use and noise low.
- An overload protection system guards against damage caused by wrong settings.
- Product or format changeovers keep downtime short.

Options

Remote access and monitoring: connect to the machine screen remotely and follow production counts. · Optional ex-proof (explosion-protected) equipment, for environments with flammable products such as alcohol.


PERFUME PACKAGING · AUTOMATIC LINES

Indexing Perfume Filling and Crimping Line

Model **BM20**

Machine page
Request a quote for this machine
Write on WhatsApp


pusulamachine.com/en/products/perfume-packaging-machines/indexing-perfume-filling-crimping-line/

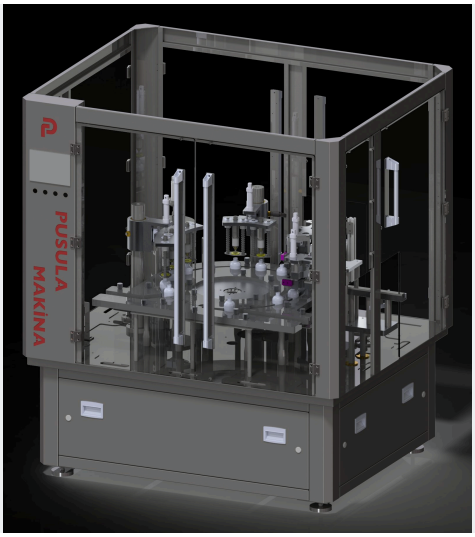

The indexing line takes bottles into special carriers (pucks) and moves them step by step. Vacuum filling, collar seating, micro crimping and valve crimping are done along these steps. It suits luxury and unusually shaped glass bottles. The model is BM20: 1 blow-off head and 4 filling heads, a 20–500 mL fill range and a two-stage vacuum tank. Besides perfume, it can also fill room fragrance and reed diffuser products.

Operating Principle	Number of Heads	Filling Method
Vacuum (Flow) Filling	**1 blow-off + 4 filling**	**Level Filling**

Energy Consumption	Total Weight	Control Unit
5.5 kW	**750–800** kg	**Delta automation system**

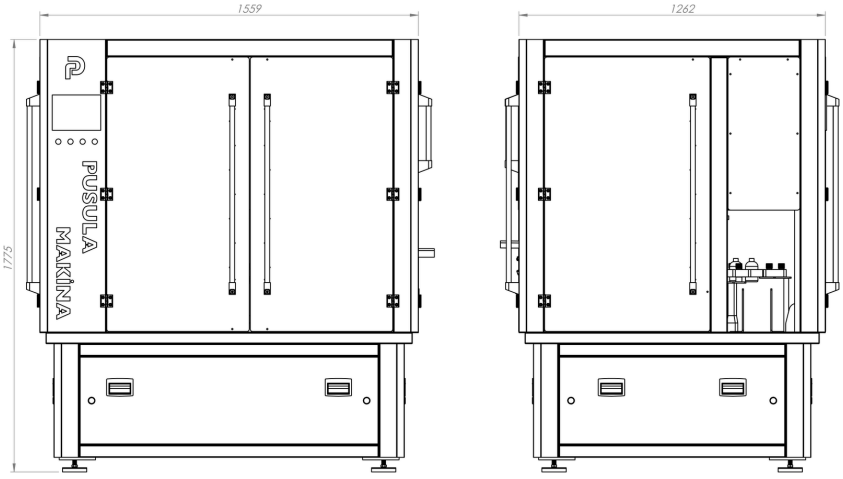

Dimensions

Width	**1559** mm
Depth	**1262** mm
Height	**1775** mm

Applications

perfume, room fragrance, reed diffuser

Technical specifications

Operating Principle	Vacuum (Flow) Filling
Filling Method	Level Filling
Number of Heads	1 blow-off + 4 filling
Energy Consumption	5.5 kW
Total Weight	750–800 kg
System Type	Index
Construction and Materials	Main chassis steel construction; product-contact surfaces AISI 316; visible exterior surfaces AISI 304 stainless steel
Control Unit	Delta automation system
Tank Type	2-stage vacuum tank
Compatible Packaging Types	Plastic, glass and metal packaging
Pneumatic Equipment	SMC
Fill Amount Range	20–500 mL
Electrical Requirement	380 V, 50 Hz, three-phase
Air Requirement	6–8 bar
Production Capacity	Varies depending on container shape, neck design and product viscosity (flowability).

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- The stainless steels used in the machine are grades 304 and 316.
- Pneumatic components are from SMC.
- Detection uses SICK and BANNER photocells and sensors.
- Gearboxes are from Varvel and Yılmaz Redüktör.
- Hygienic Tri-Clamp fittings are used. They are quick to fit and remove.
- Control is by a Delta PLC.
- The rotary table system runs motion control with a 1 ms cycle time.
- Servo motors use One Cable Technology (OCT): power and data run through a single cable.
- A 7-inch touchscreen operator panel with a Weintek display is used.
- Format parts are changed by hand for different bottle types.
- The machine screen can be reached remotely. Staff can intervene and follow live production counts.
- An overload protection system guards against damage caused by wrong settings.
- A safe, fully enclosed guard housing protects staff and keeps the surroundings clean.
- Doors have safety interlock contacts and the machine has emergency stop buttons.
- Product or format changeovers keep downtime short.
- Every part of the machine is easy to reach for maintenance.

Options

Optional stations: any two of the stations below are chosen and added to the machine. This lets the machine be set up for other products besides perfume, such as room fragrance. · Stopper pressing: presses the inner stopper (plug) into the bottle neck. · Screw capping: tightens screw caps. · Cap pressing: presses snap-on caps onto the bottle. · Crimping: crimps the valve or cap onto the bottle neck. · Collar pressing: presses the metal collar (ring) onto the bottle neck. · Optional ex-proof (explosion-protected) equipment, for environments with flammable products such as alcohol.

PERFUME PACKAGING · MANUAL
AND SEMI-AUTOMATIC EQUIPMENT

Semi-Automatic Perfume Filling Machine

Model **MNP**

Machine page
Request a quote for this machine
Write on WhatsApp


pusulamachine.com/en/products/perfume-packaging-machines/semi-automatic-perfume-filling-machine/



This machine is designed for boutique perfume makers, laboratories and R&D facilities. It fills essence and alcohol mixtures into glass bottles by vacuum suction. It is a manual machine with 1–2 filling heads and a weight of 20–30 kg. The fill level is set by hand at the nozzle.

Operating Principle	Number of Heads	Filling Accuracy
Vacuum (Flow) Filling	**1–2**	**±0.9** %

Total Weight
20–30 kg

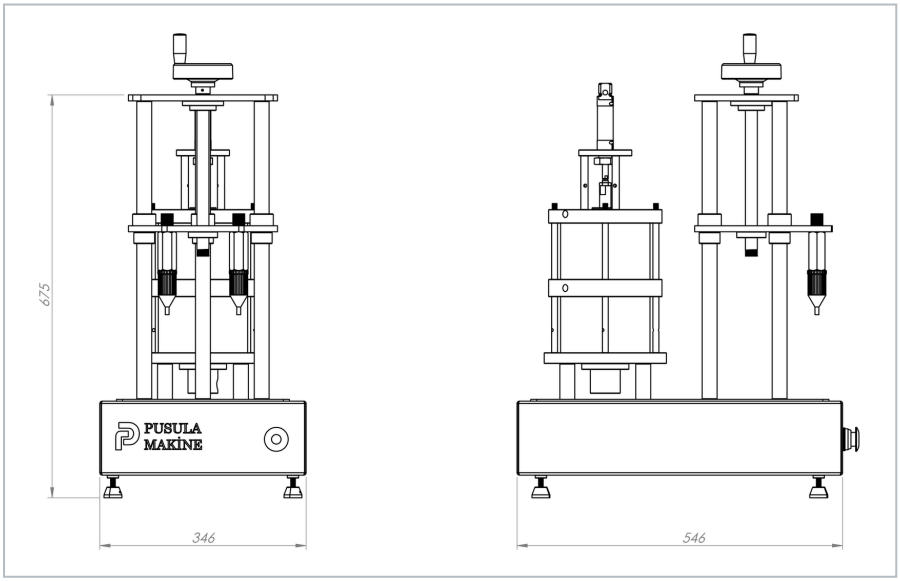

Dimensions

Width	**546** mm
Depth	**346** mm
Height	**675** mm

Applications

perfume

Technical specifications

Operating Principle	Vacuum (Flow) Filling
Filling Accuracy	±0.9 %
Number of Heads	1–2
Total Weight	20–30 kg
Production Capacity	Varies depending on container shape, neck design and product viscosity (flowability).
System Type	Manual
Construction and Materials	Main chassis steel construction; product-contact surfaces AISI 316; visible exterior surfaces AISI 304 stainless steel
Filling Tank	2-level vacuum unit
Compatible Packaging Types	Plastic, glass and metal packaging
Fill Amount Adjustment	Manual level adjustment via the nozzle
Air Requirement	6–8 bar

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- The stainless steels used in the machine are grades 304 and 316.
- Pneumatic components are from SMC.
- It runs entirely on compressed air and needs no electrical connection, so it works without sparks and safely with alcohol-based perfumes.
- A heavy, non-slip base keeps the machine from sliding or tipping while filling.
- A mechanical stroke scale lets the operator set and lock the fill volume (ml) by eye.
- When changing perfume, alcohol is poured into the tank and a few strokes clean the system. No tools are needed.
- Nozzles and hoses in contact with the liquid use Tri-Clamp fittings. They come off by hand, without tools, for washing.
- A vacuum nozzle system prevents dripping after the bottle is removed.

PERFUME PACKAGING · MANUAL
AND SEMI-AUTOMATIC EQUIPMENT

Semi-Automatic Perfume Crimping Machine

Model **MNPP**


Machine page
Request a quote for this machine
Write on WhatsApp

pusulamachine.com/en/products/perfume-packaging-machines/semi-automatic-perfume-crimping-machine/



The semi-automatic crimping machine presses metal valves of different diameters onto glass bottles. It works pneumatically and the crimping force can be adjusted. It suits boutique and medium-sized cosmetics workshops. It is a single-head machine weighing 25–30 kg. Output depends on the speed of the operator.

Operating Principle	Number of Heads	Total Weight
Piston	**1**	**25–30** kg

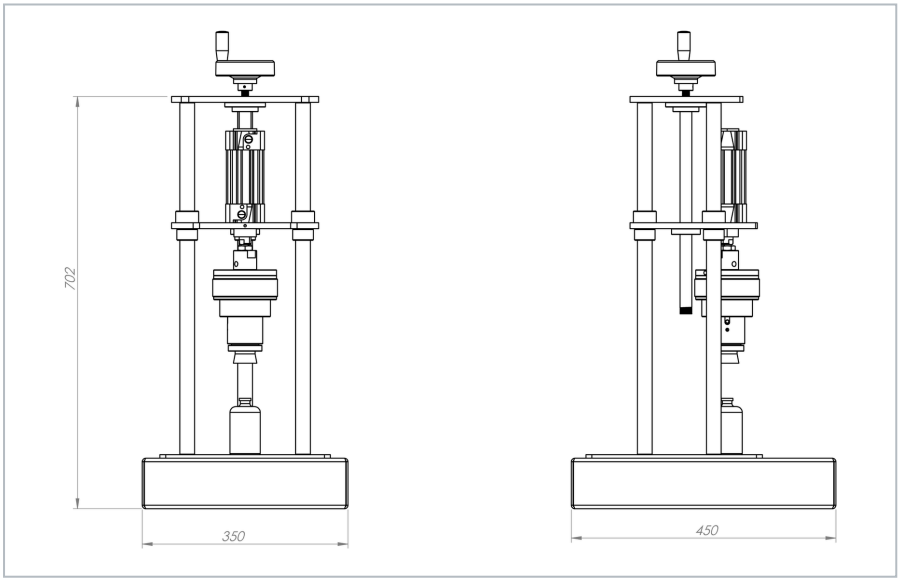

Dimensions

Width	**450** mm
Depth	**350** mm
Height	**702** mm

Applications

cosmetics, perfume

Technical specifications

Operating Principle	Piston
Number of Heads	1
Total Weight	25–30 kg
Production Capacity	Varies depending on the performance of the operating personnel.
System Type	Manual
Construction and Materials	Main chassis steel construction; product-contact surfaces AISI 316; visible exterior surfaces AISI 304 stainless steel
Compatible Packaging Types	Plastic, glass and metal packaging
Air Requirement	6–8 bar

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- The stainless steels used in the machine are grades 304 and 316.
- Pneumatic components are from SMC.
- Crimping heads are interchangeable. Valve sizes such as 13 mm, 15 mm and 20 mm are changed over within seconds.
- Head height is set with a handwheel to suit short and tall bottles.
- It runs fully on compressed air and applies the same crimping force to every bottle.
- Operated with a two-hand button set or a foot pedal (optional).
- A regulator with a pressure gauge shows the required working pressure (4–6 bar).
- There are no complex gears or electronics. Only routine lubrication and air preparation unit maintenance are needed.
- A plastic/polyamide centering support seats the bottle under the crimping head and does not scratch the glass.

Options

Two-hand buttons or foot pedal: operate with a two-hand button set or with a foot pedal.


PERFUME PACKAGING · MANUAL
AND SEMI-AUTOMATIC EQUIPMENT

Manual Perfume Collar Pressing Machine

Model **MNPY**


Machine page
Request a quote for this machine
Write on WhatsApp

pusulamachine.com/en/products/perfume-packaging-machines/manual-perfume-collar-pressing-machine/

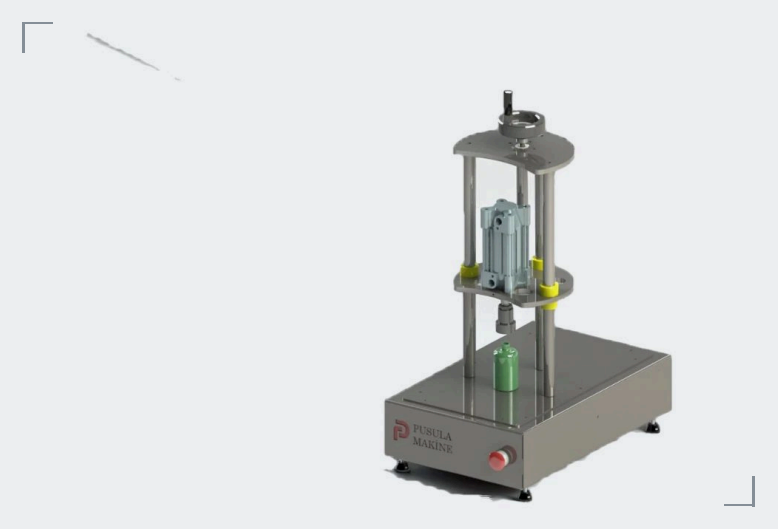

The manual collar pressing machine seats the metal collar ring of perfume bottles with a lever-operated mechanical press. It is a compact option for boutique makers, laboratories and perfume workshops. The model is MNPY: a single-head manual machine weighing 25–30 kg.

Operating Principle	Number of Heads	Total Weight
Piston	**1**	**25–30** kg

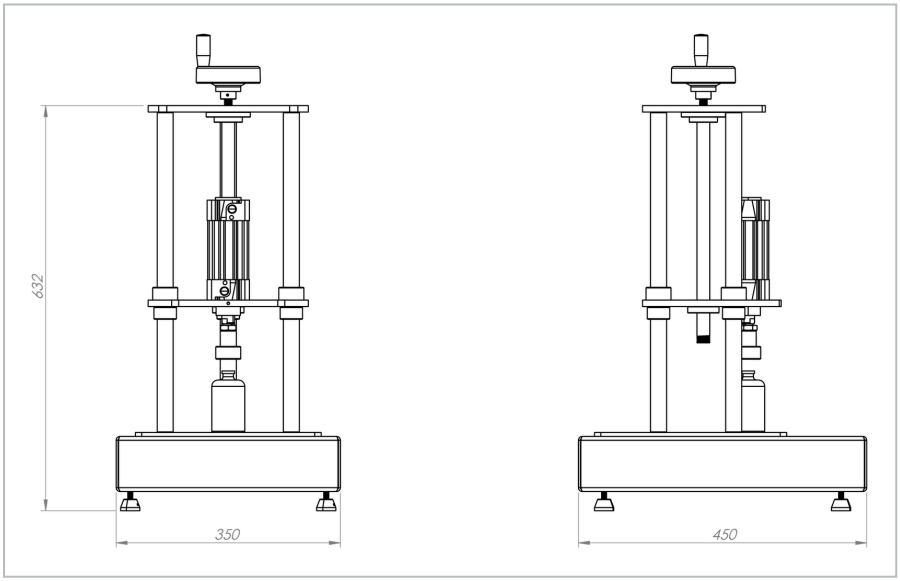

Dimensions

Width	**450** mm
Depth	**350** mm
Height	**632** mm

Applications

cosmetics, perfume

Technical specifications

Operating Principle	Piston
Number of Heads	1
Total Weight	25–30 kg
Production Capacity	Varies depending on the performance of the operating personnel.
System Type	Manual
Construction and Materials	Main chassis steel construction; product-contact surfaces AISI 316; visible exterior surfaces AISI 304 stainless steel
Compatible Packaging Types	Plastic, glass and metal packaging
Air Requirement	6–8 bar

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- The stainless steels used in the machine are grades 304 and 316.
- Pneumatic components are from SMC.
- Crimping heads are interchangeable. Valve sizes such as 13 mm, 15 mm and 20 mm are changed over within seconds.
- Head height is set with a handwheel to suit short and tall bottles.
- It runs fully on compressed air and applies the same crimping force to every bottle.
- Operated with a two-hand button set or a foot pedal (optional).
- A regulator with a pressure gauge shows the required working pressure (4–6 bar).
- There are no complex gears or electronics. Only routine lubrication and air preparation unit maintenance are needed.
- A plastic/polyamide centering support seats the bottle under the crimping head and does not scratch the glass.

Options


Two-hand buttons or foot pedal: operate with a two-hand button set or with a foot pedal.

03

PRODUCTS

Capping and Labeling

Servo-controlled, magnetic torque and pneumatic capping machines, and wrap-around, single-side and double-side labeling machines.

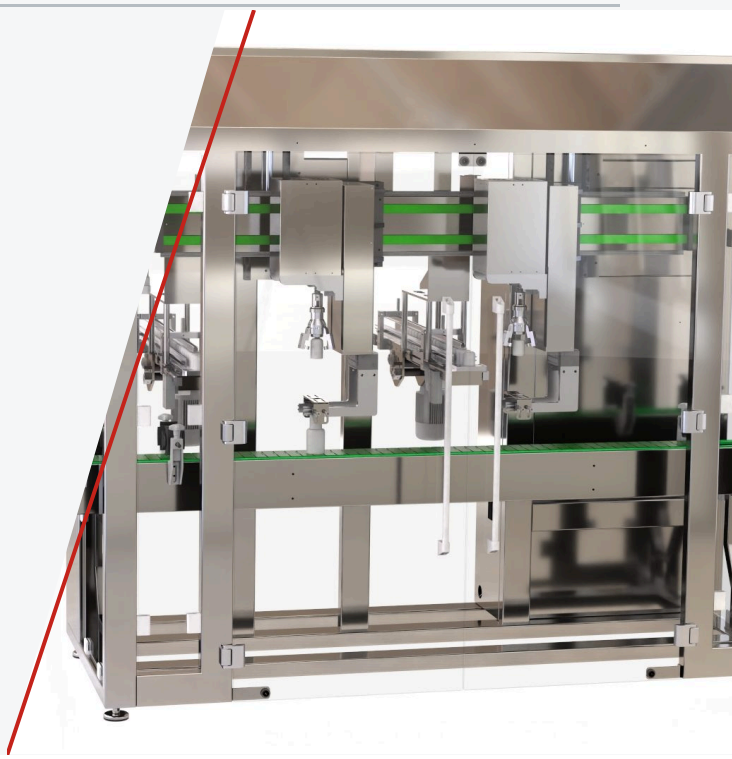

Machines in this section

Model	Machine	Key values	
	Wrap-Around Labeler for Round Bottles	–	**27**
	Single-Side Flat Bottle Labeling Machine	–	**27**
	Double-Sided Oval Bottle Labeler	–	**27**
KPS2	**Servo Capping Machine**	Number of Heads 1–3 Heads Production Capacity 40–100 per minute Energy Consumption 6–8 kW	**28**
	Magnetic Torque Capping Machine	Number of Heads 1–3 Heads Production Capacity 40–100 per minute Energy Consumption 6–8 kW	**30**
	Pneumatic Capping Machine	Number of Heads 1–3 Heads Production Capacity 40–100 per minute Energy Consumption 6–8 kW	**32**

Technical values and the dimension drawing are sent on request.

Other machines in this section

Technical values and the dimension drawing are sent on request.

CAPPING AND LABELING · LABELING

Wrap-Around Labeler for Round Bottles

The wrap-around labeling machine applies self-adhesive labels around cylindrical containers. It is used for glass or plastic bottles, jars and boxes. Label length and conveyor speed are set on the touchscreen. It is used for food, pharmaceutical, chemical and cosmetic products.

Applications
food, chemical, cosmetics, pharmaceutical

Ask for technical details

pusulamachine.com/en/products/capping-and-labeling-machines/wrap-around-labeling-machine/

CAPPING AND LABELING · LABELING

Single-Side Flat Bottle Labeling Machine

The single-side labeling machine applies self-adhesive labels to the flat face of flat, square, oval and rectangular containers. It is used for shaped containers such as shampoo, liquid soap and olive oil bottles. A top conveyor holds the container steady along the line. Speed is set on the touch panel.

Applications
food, chemical, cosmetics, detergents

Ask for technical details

pusulamachine.com/en/products/capping-and-labeling-machines/single-side-flat-bottle-labeler/

CAPPING AND LABELING · LABELING

Double-Sided Oval Bottle Labeler

The double-side labeling machine applies labels to the front and back of flat and oval bottles. The site text also mentions systems that combine capping and labeling on one line. It is used for cosmetic, chemical, food, pharmaceutical and lubricant products.

Applications
food, chemical, cosmetics,
pharmaceutical, lubricants

Ask for technical details

pusulamachine.com/en/products/capping-and-labeling-machines/double-sided-oval-bottle-labeler/

CAPPING AND LABELING · CAPPING

Servo Capping Machine

Model **KPS2**

Machine page
Request a quote for this machine
Write on WhatsApp


pusulamachine.com/en/products/capping-and-labeling-machines/servo-capping-machine/



The servo-controlled capping machine tightens caps while the bottle keeps moving. Tightening torque and rotation speed are set on a digital screen. The model is KPS2: 1–3 heads, 40–100 per minute, linear line, automatic bottle height adjustment. It is used for cosmetic, chemical, food and pharmaceutical products.

Number of Heads	Production Capacity	Energy Consumption
1–3 Heads	**40–100 per minute**	**6–8** kW

Total Weight	Control Unit
1500–2000 kg	**Delta automation system**

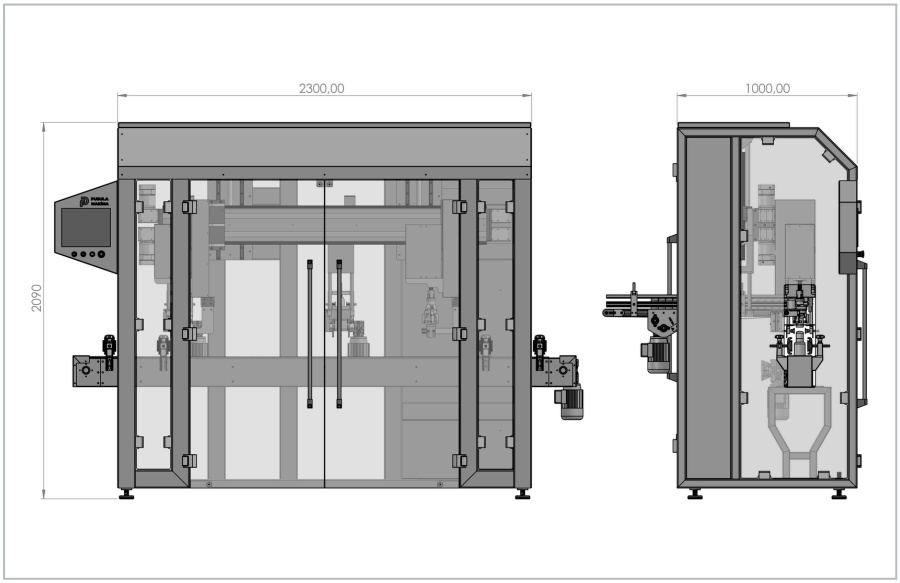

Dimensions

Width	**2300** mm
Depth	**1000** mm
Height	**2090** mm

These dimensions do not include the conveyors.

Applications

food, chemical, cosmetics, pharmaceutical

Technical specifications

Operating Principle	Servo-controlled cap tightening while the product is moving
Number of Heads	1–3 Heads
Energy Consumption	6–8 kW
Total Weight	1500–2000 kg
Production Capacity	40–100 per minute
System Type	Linear Line
Construction and Materials	Stainless steel construction
Control Unit	Delta automation system
Bottle Height Adjustment	Automatic
Compatible Packaging Types	Plastic, glass and metal packaging
Tightening Type	Servo torque
Electrical Requirement	380 V, 50 Hz, three-phase
Air Requirement	6–8 bar

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- Pneumatic components are from SMC.
- Detection uses SICK and BANNER photocells and sensors.
- Gearboxes are from Varvel and Yılmaz Redüktör.
- Control is by a Delta PLC.
- Positioning is servo driven.
- A 7–9 inch touchscreen operator panel with a Weintek display is used.
- The machine screen can be reached remotely. Staff can intervene and follow live production counts (optional).
- Servo motor power consumption can be followed live on the screen.
- An overload protection system guards against damage caused by wrong settings.
- Doors have safety interlock contacts and the machine has emergency stop buttons.
- Product or format changeovers keep downtime short.
- Every part of the machine is easy to reach for maintenance.

Options

Remote access and monitoring: connect to the machine screen remotely and follow production counts.

CAPPING AND LABELING · CAPPING

Magnetic Torque Capping Machine

Machine page
Request a quote for this machine
Write on WhatsApp

pusulamachine.com/en/products/capping-and-labeling-machines/magnetic-torque-capping-machine/



The magnetic torque machine tightens plastic and metal caps through a magnetic coupling. The coupling has no friction and applies the same torque to every cap. The torque limit can be adjusted. It is used for food, chemical, cosmetic and pharmaceutical products. It is a linear-line machine with 1–3 heads, a capacity of 40–100 per minute and automatic bottle height adjustment.

Number of Heads **1–3 Heads**	**Production Capacity** **40–100 per minute**	**Energy Consumption** **6–8** kW
Total Weight **1500–2000** kg	**Control Unit** **Delta automation system**	

Applications

food, chemical, cosmetics, pharmaceutical

Technical specifications

Operating Principle	Magnetic-torque cap tightening while the product is moving
Number of Heads	1–3 Heads
Energy Consumption	6–8 kW
Total Weight	1500–2000 kg
Production Capacity	40–100 per minute
System Type	Linear Line
Construction and Materials	Stainless steel construction
Control Unit	Delta automation system
Bottle Height Adjustment	Automatic
Compatible Packaging Types	Plastic, glass and metal packaging
Tightening Type	Magnetic torque
Electrical Requirement	380 V, 50 Hz, three-phase
Air Requirement	6–8 bar

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- Pneumatic components are from SMC.
- Detection uses SICK and BANNER photocells and sensors.
- Gearboxes are from Varvel and Yılmaz Redüktör.
- Control is by a Delta PLC.
- Positioning is servo driven.
- A 7–9 inch touchscreen operator panel with a Weintek display is used.
- The machine screen can be reached remotely. Staff can intervene and follow live production counts (optional).
- Servo motor power consumption can be followed live on the screen.
- An overload protection system guards against damage caused by wrong settings.
- Doors have safety interlock contacts and the machine has emergency stop buttons.
- Product or format changeovers keep downtime short.
- Every part of the machine is easy to reach for maintenance.

CAPPING AND LABELING · CAPPING

Pneumatic Capping Machine

Machine page
Request a quote for this machine
Write on WhatsApp

pusulamachine.com/en/products/capping-and-labeling-machines/pneumatic-capping-machine/



The pneumatic capping machine runs on the plant's compressed air. It closes screw caps and press-on caps. Pressure limits can be adjusted. It is used for chemical, lubricant, detergent and cosmetic packaging. It is a linear-line machine with 1–3 heads, a capacity of 40–100 per minute and automatic bottle height adjustment.

Number of Heads **1–3 Heads**	Production Capacity **40–100 per minute**	Energy Consumption **6–8** kW
Total Weight **1500–2000** kg	Control Unit **Delta automation system**	

Applications

chemical, cosmetics, lubricants, detergents

Technical specifications

Operating Principle	Pneumatic cap tightening while the product is moving
Number of Heads	1–3 Heads
Energy Consumption	6–8 kW
Total Weight	1500–2000 kg
Production Capacity	40–100 per minute
System Type	Linear Line
Construction and Materials	Stainless steel construction
Control Unit	Delta automation system
Bottle Height Adjustment	Automatic
Compatible Packaging Types	Plastic, glass and metal packaging
Tightening Type	Pneumatic
Electrical Requirement	380 V, 50 Hz, three-phase
Air Requirement	6–8 bar

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- Pneumatic components are from SMC.
- Detection uses SICK and BANNER photocells and sensors.
- Gearboxes are from Varvel and Yılmaz Redüktör.
- Control is by a Delta PLC.
- Positioning is servo driven.
- A 7–9 inch touchscreen operator panel with a Weintek display is used.
- The machine screen can be reached remotely. Staff can intervene and follow live production counts (optional).
- Servo motor power consumption can be followed live on the screen.
- An overload protection system guards against damage caused by wrong settings.
- Doors have safety interlock contacts and the machine has emergency stop buttons.
- Product or format changeovers keep downtime short.
- Every part of the machine is easy to reach for maintenance.

04

PRODUCTS

Front-End and End-of-Line

Machines that feed bottles and caps at the start of the line, and handle cartons and pallets at the end.



Bottle feeding | Filling | Capping | Labeling | **Case packing** | **Palletizing**

Machines in this section

Model	Machine	Key values	
DTPS1000T	**Rotary Bottle Feeding Table**	–	**35**
	Case Barcode Labeling Machine	–	**35**
PSD	**Bottle Unscrambler**	Working Range 20–100 mm Production Capacity 50–150 per minute Energy Consumption 6–8 kW	**36**
PSL-K15	**Case Erector and Sealer Machine**	Production Capacity 5–8 per minute Energy Consumption 6–8 kW Total Weight 3000–3500 kg	**38**
CTP8	**Palletizing Machine**	Number of Heads 1 Production Capacity 5–8 per minute Energy Consumption 7–9 kW	**40**

Technical values and the dimension drawing are sent on request.

Other machines in this section

Technical values and the dimension drawing are sent on request.



FRONT-END AND END-OF-LINE · FRONT-END: FEEDING

Rotary Bottle Feeding Table

Model **DTPS1000T**

The rotary table feeds empty bottles into the filling line in order at the start of the line. It is also used to collect products at the end of the line. It works with glass and plastic bottles, jars and containers. Rotation speed and the guides for the container diameter can be adjusted.

Ask for technical details

pusulamachine.com/en/products/end-of-line-packaging-machines/rotary-bottle-feeding-table/

FRONT-END AND END-OF-LINE · END-OF-LINE: CASE PACKING AND PALLETIZING

Case Barcode Labeling Machine

The end-of-line labeling machine applies labels carrying barcode, QR code and weight data to the surface of packed cartons. Printing and applying happen in one machine. It is added at the last stage of liquid filling, capping and case packing lines.

Applications
food, chemical, cosmetics, e-commerce

Ask for technical details

pusulamachine.com/en/products/end-of-line-packaging-machines/case-barcode-labeling-machine/

Which one should I choose?

Tell us your product, container and target capacity. We will choose the right machine together.

Request a Quote **Write on WhatsApp**


FRONT-END AND END-OF-LINE · FRONT-END: FEEDING

Bottle Unscrambler

Model **PSD**

Machine page
Request a quote for this machine
Write on WhatsApp

pusulamachine.com/en/products/end-of-line-packaging-machines/bottle-unscrambler/

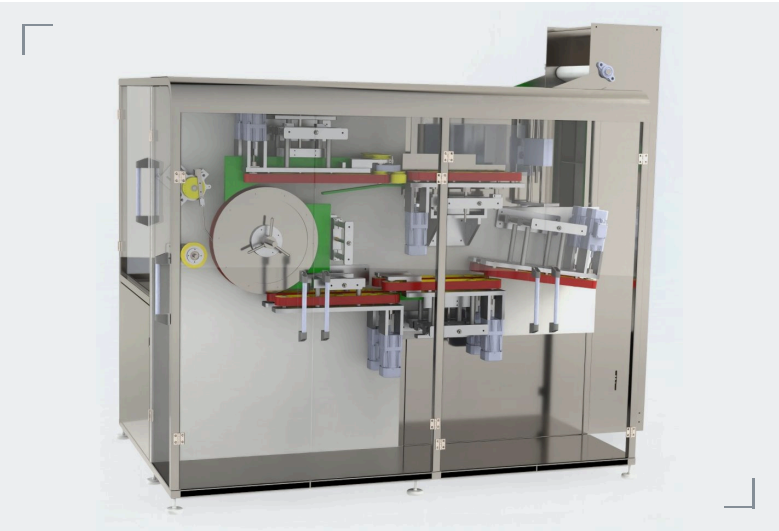

The bottle unscrambler lines up the plastic bottles loaded into its hopper with a belt system and feeds them to the line. The belts guide the bottles quietly and steadily without scratching them. The model is PSD: it works with containers of 20–100 mm and lines up 50–150 bottles per minute. Sensors watch the hopper level and jams on the line. It is used at the start of filling and capping lines.

Operating Principle	Production Capacity	Energy Consumption
Belt-driven	**50–150 per minute**	**6–8** kW

Total Weight	Control Unit
500–750 kg	**Delta automation system**

Dimensions

Width	Depth	Height
2738 mm	**1490** mm	**2266** mm

Applications

food, chemical, cosmetics, pharmaceutical

Technical specifications

Operating Principle	Belt-driven
Construction and Materials	304-grade stainless steel
Control Unit	Delta automation system
Compatible Packaging Types	Plastic containers
Working Range	20–100 mm
Production Capacity	50–150 per minute
Electrical Requirement	380 V, 50 Hz, three-phase
Energy Consumption	6–8 kW
Air Requirement	6–8 bar
Total Weight	500–750 kg

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- The machine body and all product-contact surfaces are 304-grade stainless steel.
- A wear-resistant belt system guides plastic containers quietly and steadily without scratching them.
- Adjustable mechanical guides fit plastic bottles of different shapes, from 20 to 100 mm in diameter or width.
- The pneumatic valve and cylinder group runs on 6–8 bar air pressure.
- The rigid frame (500–750 kg) keeps the machine stable even at high speeds.
- Control is by a Delta PLC and an operator panel.
- It lines up 50–150 bottles per minute, in step with the line speed.
- A frequency-controlled drive balances the speed between the feed hopper, the belts and the exit conveyor automatically.
- When changing to another plastic container size, settings are made quickly on the operator panel.
- It runs on a 380 V, 50 Hz, three-phase supply with a power of 6–8 kW.
- The moving parts are protected by a closed guard cabinet.
- Safety switches stop the machine when the covers are opened, and there are emergency stop buttons.
- Sensors detect the hopper level and bottle jams on the line, and the machine stops automatically.
- For changes within the 20–100 mm range, mechanical adjustment points keep downtime short.
- Every part of the machine is easy to reach for belt changes, checking the pneumatic conditioner and cleaning.

FRONT-END AND END-OF-LINE · END-OF-LINE: CASE PACKING AND PALLETIZING

Case Erector and Sealer Machine

Model **PSL-K15**

Machine page
Request a quote for this machine
Write on WhatsApp


pusulamachine.com/en/products/end-of-line-packaging-machines/case-erector-sealer-machine/



This machine erects flat cardboard cartons and folds the bottom flaps. After the products are placed, it closes the top flaps and tapes top and bottom at the same time. Erecting, closing and taping are combined in one machine. The model is PSL-K15: 5–8 per minute, 6–8 kW power, 3000–3500 kg weight. The carton size is adjusted to the size you need.

Model	Production Capacity	Energy Consumption
PSL-K15	**5–8 per minute**	**6–8** kW

Total Weight	Control Unit
3000–3500 kg	**Delta automation system**

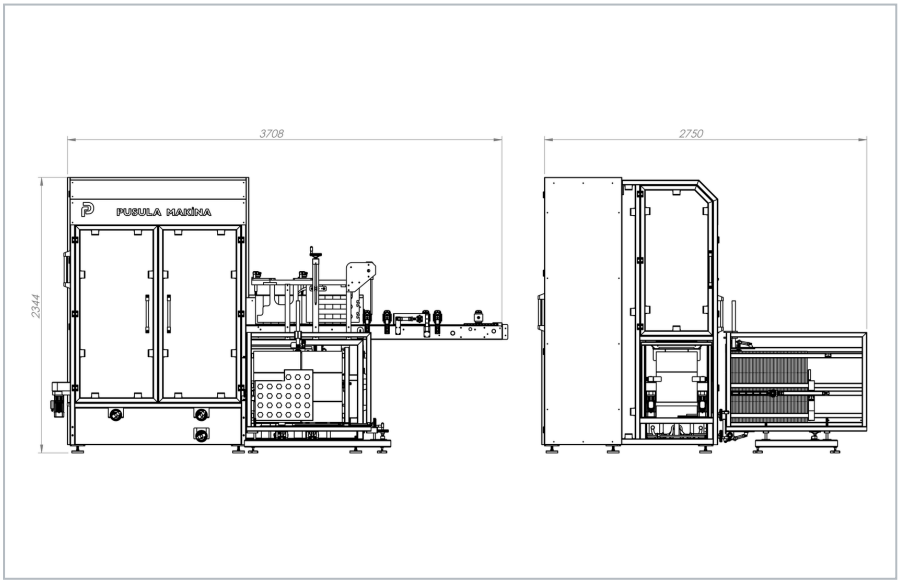

Dimensions

Width	**3708** mm
Depth	**2750** mm
Height	**2344** mm

These dimensions include the conveyors.

Applications

food, chemical, cosmetics

Technical specifications

Model	PSL-K15
Operating Principle	Servo Cam
Energy Consumption	6–8 kW
Total Weight	3000–3500 kg
Production Capacity	5–8 per minute
System Type	Linear Line
Construction and Materials	Steel construction
Control Unit	Delta automation system
Compatible Packaging Types	Plastic, glass and metal packaging
Case	Cases adjustable to any required size
Quantity per Case	Case design to suit the required quantities
Electrical Requirement	380 V, 50 Hz, three-phase
Air Requirement	6–8 bar

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- Pneumatic components are from SMC.
- Detection uses SICK and BANNER photocells and sensors.
- Gearboxes are from Varvel and Yılmaz Redüktör.
- Folded cartons are stacked in bulk in the carton magazine. The machine picks them one by one by vacuum.
- Carton size is set with handwheels and scales, without tools.
- Mechanical guides keep the carton body at exactly 90° while its top and bottom flaps are folded.
- Control is by a Delta PLC.
- A servo system picks the products and places them in the carton.
- Positioning is servo driven.
- A 7–9 inch touchscreen operator panel with a Weintek display is used.
- The machine screen can be reached remotely. Staff can intervene and follow live production counts (optional).
- Servo motor power consumption can be followed live on the screen.
- An overload protection system guards against damage caused by wrong settings.
- Doors have safety interlock contacts and the machine has emergency stop buttons.
- Product or format changeovers keep downtime short.
- Every part of the machine is easy to reach for maintenance.
- A photocell check responds when cartons run low in the magazine or a carton jams.

Options

Remote access and monitoring: connect to the machine screen remotely and follow production counts.

FRONT-END AND END-OF-LINE · END-OF-LINE: CASE PACKING AND PALLETIZING

Palletizing Machine


Model **CTP8**

Machine page

Request a quote for this machine

Write on WhatsApp


pusulamachine.com/en/products/end-of-line-packaging-machines/palletizing-machine/

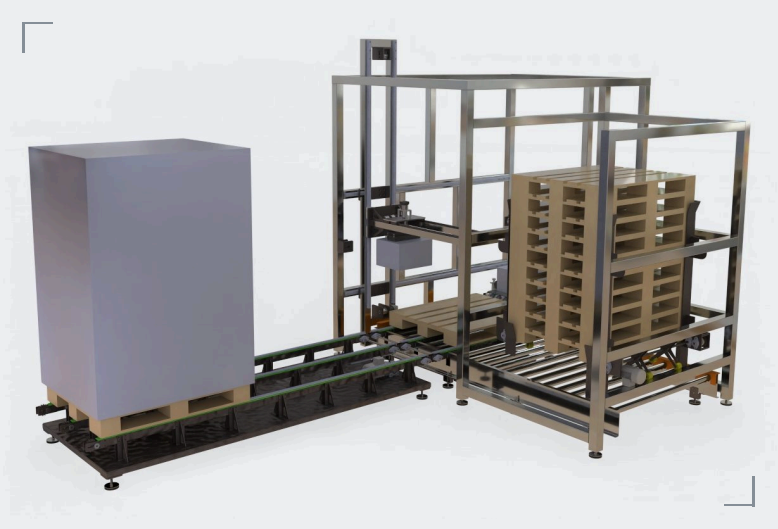

This machine is model CTP8 and is a palletizing machine: it places ready-packed cartons on the pallet in the pattern you need. It is not a stretch wrapping machine; it only palletizes. It works with servo-controlled movement. It has a store for 8–10 empty pallets and 10 standard recipes. Its values are 5–8 per minute, 7–9 kW power and a weight of 3000–4000 kg. It is used in food, cosmetics and chemical plants.

Number of Heads	Production Capacity	Energy Consumption
1	**5–8 per minute**	**7–9** kW

Total Weight	Control Unit
3000–4000 kg	**Delta automation system**

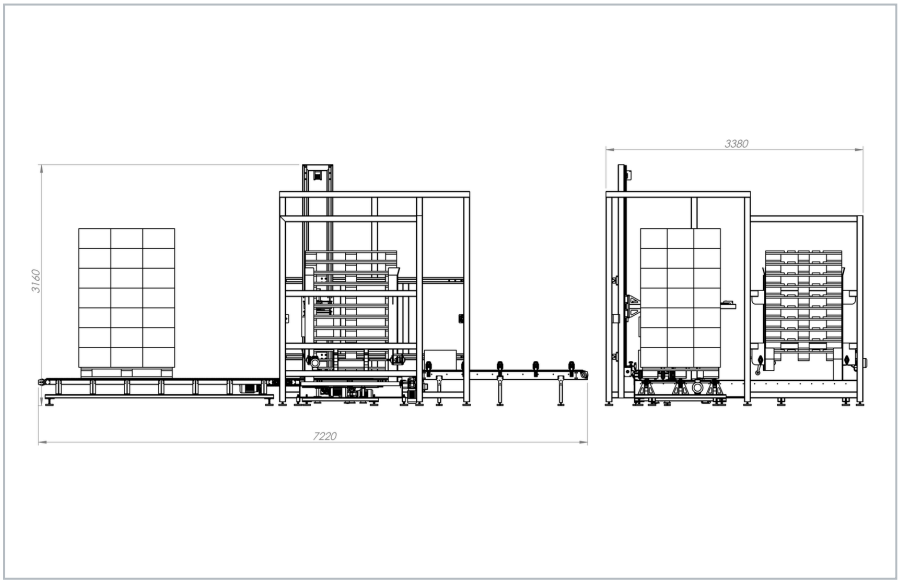

Dimensions

Width	**7220** mm
Depth	**3380** mm
Height	**3160** mm

These dimensions include the conveyors.

Applications

food, chemical, cosmetics

Technical specifications

Operating Principle	Product arrangement using servo-controlled motion
Number of Heads	1
Energy Consumption	7–9 kW
Total Weight	3000–4000 kg
Production Capacity	5–8 per minute
System Type	Modular
Construction and Materials	Main chassis steel construction; product-contact surfaces AISI 316; visible exterior surfaces AISI 304 stainless steel
Control Unit	Delta automation system
Empty Pallet Magazine	8–10 pallets
Compatible Packaging Types	Plastic, glass and metal packaging
Pallet Feeding	Automatic
Recipe Type	10 standard recipes
Positioning Accuracy	0.1 mm Motion Accuracy
Electrical Requirement	380 V, 50 Hz, three-phase
Air Requirement	6–8 bar

Values are for the standard configuration; they are confirmed in the quote for your product.

Key features

- Pneumatic components are from SMC.
- Detection uses SICK and BANNER photocells and sensors.
- Gearboxes are from Varvel and Yılmaz Redüktör.
- Control is by a Delta PLC.
- Positioning is servo driven.
- A 7–9 inch touchscreen operator panel with a Weintek display is used.
- The machine screen can be reached remotely. Staff can intervene and follow live production counts (optional).
- Servo motor power consumption can be followed live on the screen.
- An overload protection system guards against damage caused by wrong settings.
- Doors have safety interlock contacts and the machine has emergency stop buttons.
- Product or format changeovers keep downtime short.
- Every part of the machine is easy to reach for maintenance.

Options

Remote access and monitoring: connect to the machine screen remotely and follow production counts.

TURNKEY LINES

Turnkey Filling, Capping and Labeling Line

We plan and install the whole line, from bottle feeding to palletizing. The line is designed around your floor area and your target capacity.

01

Bottle feeding

Rotary Bottle Feeding Table p. 35

Bottle Unscrambler p. 36

02

Filling

Flowmeter Filling Machine, Prestige Series p. 5

Flowmeter Filling Machine, Basic Series p. 7

Piston Filling Machine, Prestige Series p. 9

Piston Filling Machine, Basic Series p. 11

Rotary Perfume Filling and Capping Line p. 14

Linear Perfume Filling Line p. 16

Indexing Perfume Filling and Crimping Line p. 18

Semi-Automatic Perfume Filling Machine p. 20

03

Capping

Semi-Automatic Perfume Crimping Machine p. 22

Manual Perfume Collar Pressing Machine p. 24

Servo Capping Machine p. 28

Magnetic Torque Capping Machine p. 30

Pneumatic Capping Machine p. 32

04

Labeling

Wrap-Around Labeler for Round Bottles p. 27

Single-Side Flat Bottle Labeling Machine p. 27

Double-Sided Oval Bottle Labeler p. 27

05

Case packing

Case Erector and Sealer Machine p. 38

Case Barcode Labeling Machine p. 35

06

Palletizing

Palletizing Machine p. 40

What we need for a line project

- Your product and its viscosity (how thin or thick it is)
- Container type and volume
- Target capacity
- Size of the floor area available
- Machines you already have

Adding a single machine to an existing line

You may want to add just a capping, labeling or other machine to your existing line. Tell us the speed of your line, the conveyor height and the bottle type. We settle whether the integration is possible, and its scope, in the quote.

Request a quote for a line project

TURNKEY LINES

Auxiliary equipment

Auxiliary equipment that completes your line. It is added alongside the main machines, according to the needs of the line.

MIXING

MMIX Mixer

Model **MMIX**

Mixing unit with asynchronous motor control.

Operating Principle	Mixing with asynchronous control
Energy Consumption	0.37 kW
Total Weight	50–75 kg
Electrical Requirement	380 V, 50 Hz, three-phase
System Type	Mixer

FILLING

SD4 Flowmeter Hot Filling Machine

Model **SD4**

Four-head hot filling machine with flowmeter dosing.

Operating Principle	Flowmeter-Based Filling
Filling Accuracy	±0.3 %
Number of Heads	4
Energy Consumption	5.5 kW
Total Weight	300–400 kg
Compatible Packaging Types	Plastic, glass and metal packaging
System Type	Linear Line

BOTTLE FEEDING

DPL Automatic Can Feeding

Model **DPL**

Modular automatic feeding system for metal bottles (DPL); pallet feeding and separator removal are automatic.

Operating Principle	Arrangement by asynchronously controlled motion
Energy Consumption	7–9 kW
Total Weight	1500–2000 kg
Electrical Requirement	380 V, 50 Hz, three-phase
Compatible Packaging Types	Metal bottle
System Type	Modular

Values are for the standard configuration; they are confirmed in the quote for your product. It has no page of its own. It is included in the quote according to your line.

Request a quote to add this equipment to your line

Get a quote for your project

Tell us your product, container and target capacity. Our engineers will get back to you.

What happens next

01
We receive your request.

02
One of our engineers calls or writes to you.

03
We send you a quote and a technical data sheet.

Request a Quote | **Write on WhatsApp** | Call us **+90 537 916 03 71**

PUSULA MAKİNA

Phone
+90 537 916 03 71

WhatsApp
+90 537 916 03 71

Email
info@pusulamachine.com

Web
pusulamachine.com

Address
İOSB AYKOSAN Sanayi Sitesi 2. Kısım, 9. Ada A Blok No:1, Başakşehir / İstanbul

Working hours
Monday–Friday 08:30–18:30 (Istanbul time, GMT+3)

Instagram
instagram.com/pusulamachine

Latest edition and other languages: pusulamachine.com/en/catalog/

Warranty and delivery time vary by machine and are stated in the quote. Prices are given in the quote.

English edition · November 2026